
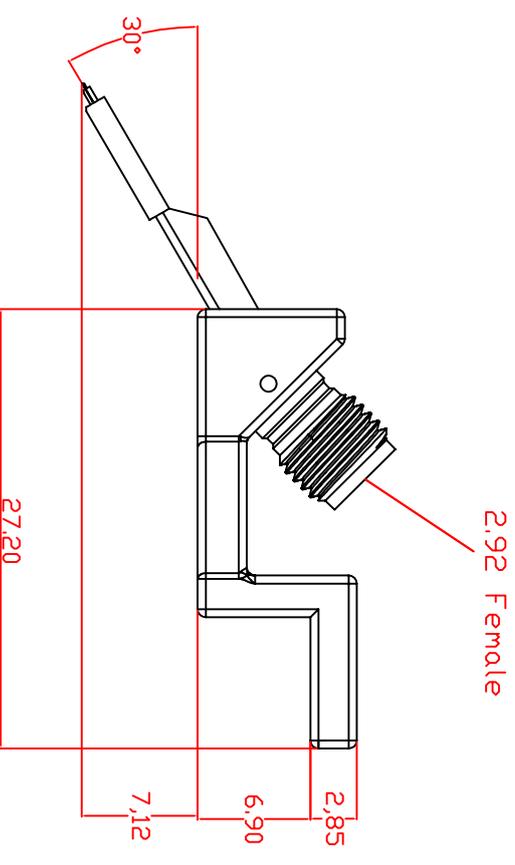


OUTLINE DRAWING:

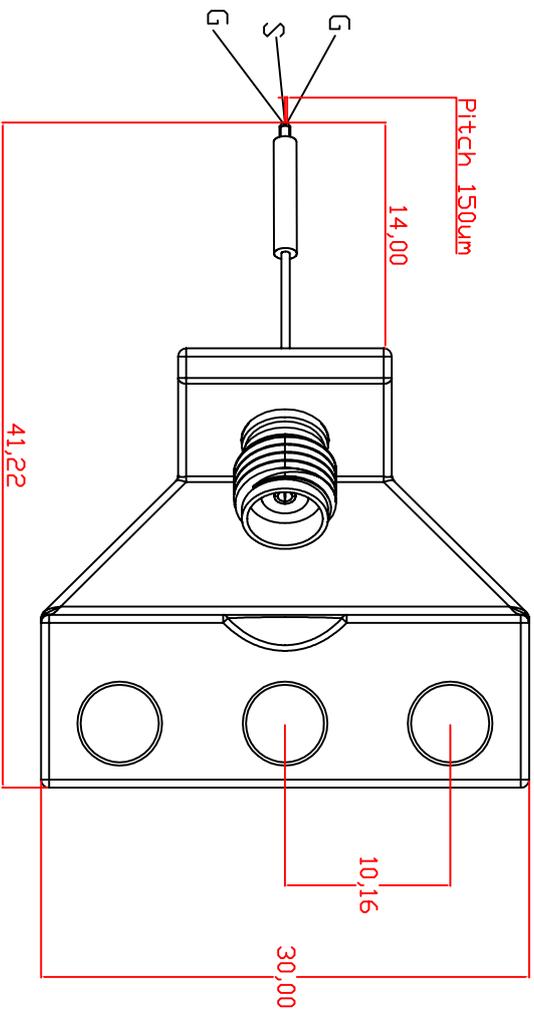

- NOTE:
- 1.IMPEDANCE: 50 OHM
 - 2.FREQUENCY RANGE: DC~40GHZ
 - 3.RETURN LOSS: -18dB MIN
 - 4.DWV: 500 VRMS MIN
 - 5.OPERATING TEMP: -40~+125°C

BODY	STAINLESS STEEL	PASSIVATED
DIELECTRIC	ULTEM	NATURAL
CENTER CONTACT	BECCU	GOLD
DESCRIPTION	MATERIAL	FINISH

DIMENSION: mm	General tolerance Unless otherwise specified		
	0 Plance: ±0.2	1 Plance: ±0.2	2 Plance: ±0.2
Angles:			
SERIES: 2.92MM	CABLE:		
PRODUCT Spec:	ASSEMBLY INSTR		
DRAWN:	FAN	2025-06-27	
CHECKED:	FAN	2025-06-27	
APPROVED:	Ma tthe w	2025-06-27	
CUSTOMER DRAWING		PART NUM: S2029200200DF	
Title: DSK-F-40-GSG-DF-EDP		DRAWING NUM: 292051	
SCALE: 5:1	REMARK:	PAGE: 1/1	

DesignCon