
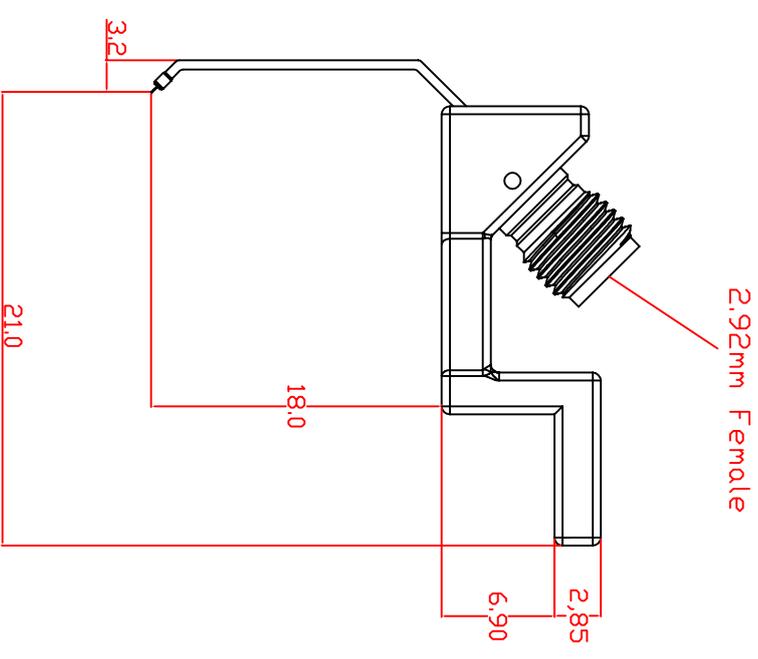


# OUTLINE DRAWING:

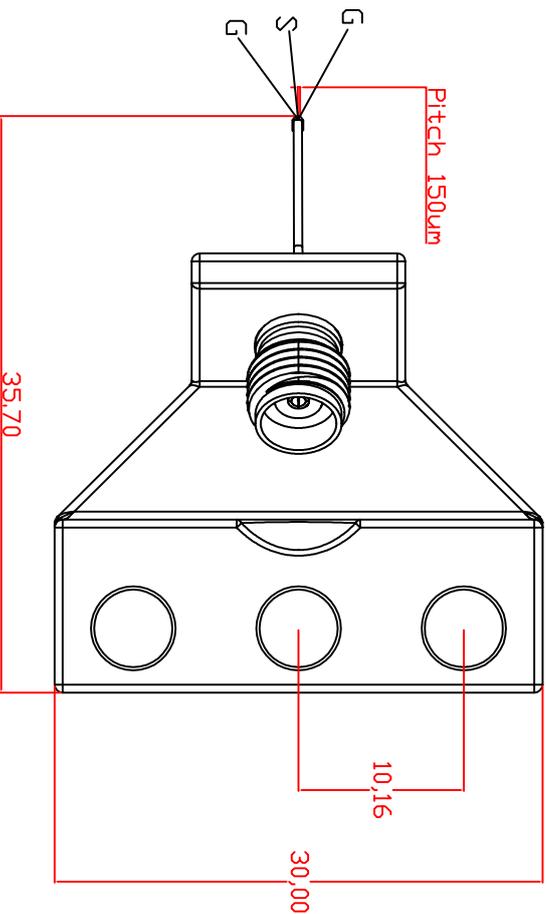

- NOTE:
- 1.IMPEDANCE: 50 OHM
  - 2.FREQUENCY RANGE: DC~40GHZ
  - 3.RETURN LOSS: -18dB MIN
  - 4.DWV: 500 VRMS MIN
  - 5.OPERATING TEMP: -40~+125°C

BODY	STAINLESS STEEL	PASSIVATED
DIELECTRIC	ULTEM	NATURAL
CENTER CONTACT	BECCU	GOLD
DESCRIPTION	MATERIAL	FINISH

DIMENSION:	mm	SERIES:	2.92MM	CABLE:	
General tolerance Unless otherwise specified		PRODUCT Spec:	ASSEMBLY INSTR		
0 Plance:	+0.2	DRAWN:	FAN	2025-05-21	
1 Plance:	+0.2	CHECKED:	FAN	2025-05-21	
2 Plance:	+0.2	APPROVED:	Matt	2025-05-21	
Angles:		<b>CUSTOMER DRAWING</b>			
This drawing is a controlled document					
<b>DesignCon</b>		Title:		DSK-F40-GSG-DF-RVP	
		PART NUM:		S1529200200DF	
		DRAWING NUM:		292015	
SCALE: 5:1		REMARK:		PAGE: 1/1	